



Type K PFA Insulated Twin Twisted Pair Thermocouple Cable / Wire (IEC)

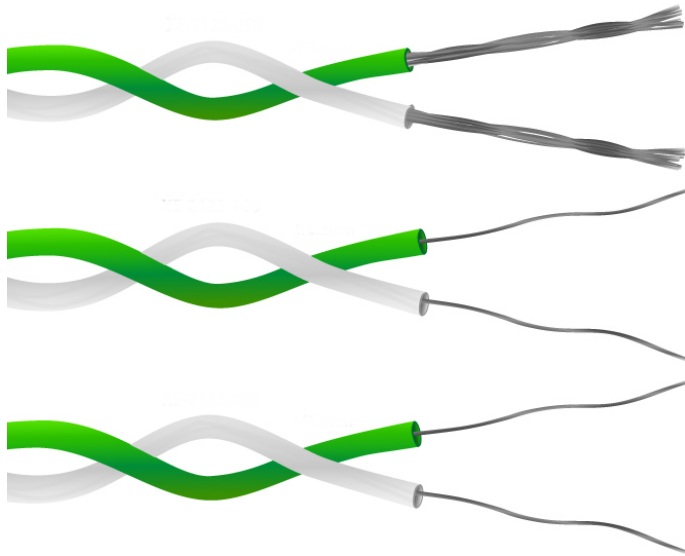

10m

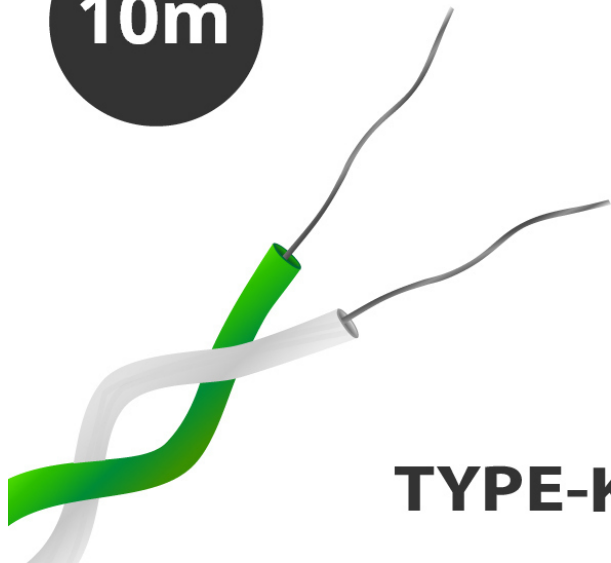

TYPE-K



[Click here to view product](#)

Product Code	XE-2122
General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
Cable Length	5m, 10m, 25m, 50m, 100m
Cable Type	Single pair of PFA insulated conductors twisted together
Core / Strands	1/0.2mm, 7/0.2mm, 1/0.3mm, 1/0.508mm
Conductor Cross Section 1/0.2 (mm²)	0.032
Conductor Cross Section 1/0.315 (mm²)	0.078



www.labfacility.com | sales@labfacility.com

sales tel: +44(0)1243 871280

Conductor Cross Section 1/0.508 (mm ²)	0.203
Conductor Cross Section 7/0.2 (mm ²)	0.219
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PFA Teflon®
Loop Resistance 1/0.2 (Ohms per combined metre)	31.8
Loop Resistance 1/0.315 (Ohms per combined metre)	12.8
Loop Resistance 1/0.508 (Ohms per combined metre)	4.9
Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 1