



Type K PFA Insulated Twin Twisted Pair Thermocouple Cable / Wire (ANSI)

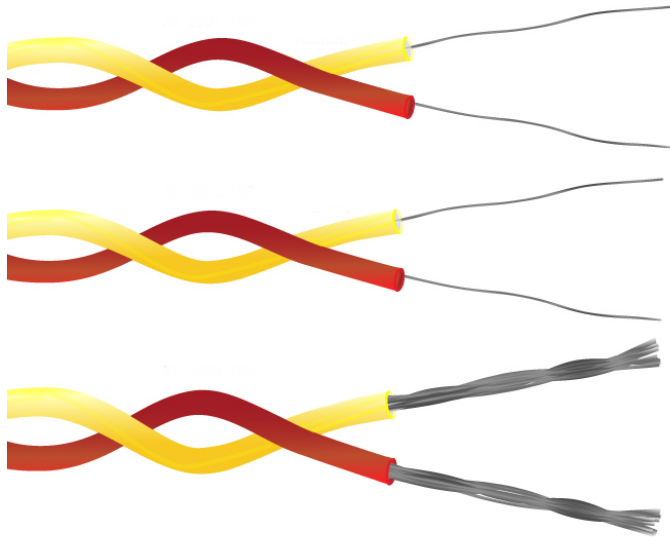

10m

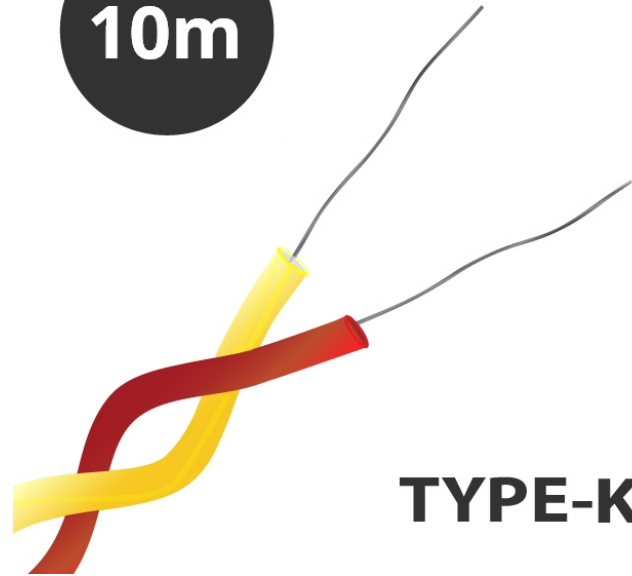

TYPE-K

[Click here to view product](#)

Product Code	XE-2801
Cable Length	10m, 25m, 50m, 100m
Cable Type	Single pair of PFA insulated conductors twisted together
Core / Strands	1/0.2mm, 1/0.3mm or 7/0.2mm
Conductor Cross Section 1/0.2 (mm ²)	0.032
Conductor Cross Section 1/0.315 (mm ²)	0.078
Conductor Cross Section 7/0.2 (mm ²)	0.219
+ Colour	Yellow
- Colour	Red

Drain Wire	No
Insulation Material	PFA Teflon®
Loop Resistance 1/0.2 (Ohms per combined metre)	31.8
Loop Resistance 1/0.315 (Ohms per combined metre)	12.8
Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to ANSI MC96.1
Thermocouple Type	K
Tolerance	Class 1