


## DishTemp Dishwasher Thermometer

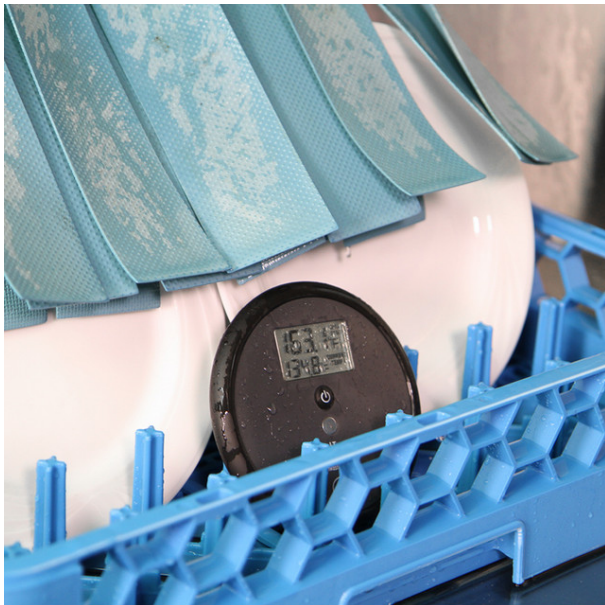

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

The DishTemp® dishwasher thermometer simulates a plate as it's cleaned and sanitised in a commercial dishwasher, accurately recording the maximum surface temperature at the touch of a single button.

The DishTemp® thermometer eliminates the need for costly and inaccurate test strips and stem thermometers that don't stay in place and don't record temperature at the plate surface.

Built to survive daily use in professional kitchens, the DishTemp dishwasher thermometer indicates temperature over the range of 0 to 90 °C with a resolution of 0.1 °C/°F and an accuracy of ±0.5 °C.

Incorporating a durable water-tight seal, the DishTemp is waterproof to IP66 and is supplied complete with a traceable certificate of calibration, calibrated at one point only - 71°C .

## Specifications

|                            |  |
|----------------------------|--|
| <b>Product Code</b>        | XE-3939-001  |
| <b>General Description</b> | The DishTemp® dishwasher thermometer simulates a plate as it's cleaned and sanitised in a commercial dishwasher, accurately recording the maximum surface temperature at the touch of a single button. |
| <b>Thermocouple Type</b>   | K  |
| <b>Battery</b>             | 3 volt CR2032 lithium coin cell  |
| <b>Calibration</b>         | traceable calibration certificate  |
| <b>Display</b>             | LCD  |
| <b>Resolution</b>          | 0.1°C /°F  |
| <b>Max. Temperature</b>    | +90°C  |
| <b>Min. Temperature</b>    | 0°C  |
| <b>IP Rating</b>           | IP66   |
| <b>Accuracy</b>            | ±0.5 °C.   |
| <b>Dimensions</b>          | 14 x 127mm   |
| <b>Weight</b>              | 120 grams  |



|             |  |
|-------------|--|
| Features #1 | measurement scale Celsius/Fahrenheit                           |
| Features #2 | Simulates plate surface temperature                            |
| Features #3 | Traceable certificate of calibration (@ 71°C - one point only) |
| Features #4 | Displays maximum temperature reached                           |