


General Purpose Pt100 Probe with PFA lead - Type RTD / PRT

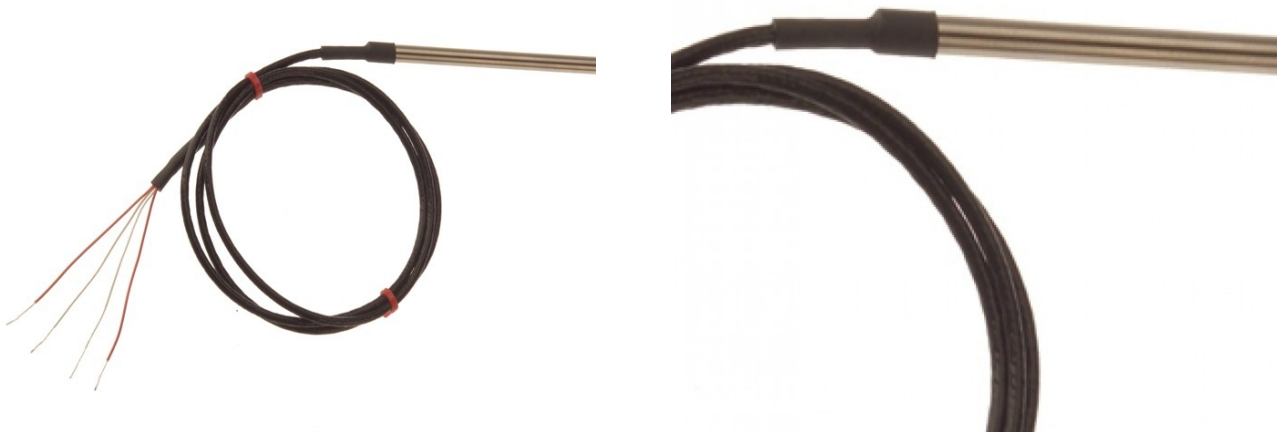

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

General Purpose Pt100 Probe with PFA lead - Type RTD / PRT

Multipurpose Pt100 Probe to IEC751

Class B, 4-wire connection

Rigid 316 stainless steel sheath, 3.0, 4.0, 4.5 or 6.0mm diameter

1 or 2 metre Teflon® insulated, screened lead

Sensor temperature rating -50°C to +250°C

Specifications**Specifications**

General Description	Multipurpose Pt100 Probe to IEC751
Sensor Type	Pt100 (100 Ohms @ 0°C) to IEC 751, Class B, 4 wire
Sheath Material	3.0, 4.0, 4.5 or 6.0mm diameter 316 stainless steel sheath.
Cable Length	1 or 2 metre flexible Teflon® insulated, screened
Termination Type	4-wire tails allows connection to any PT100 instrument 2, 3 or 4 wire
Max. Temperature	+250°C
Min. Temperature	-50°C
Standards Met	IEC751