




LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

3 Core PFA Insulated, Tin Plated Copper Screen, PRT Sensor Cable / Wire

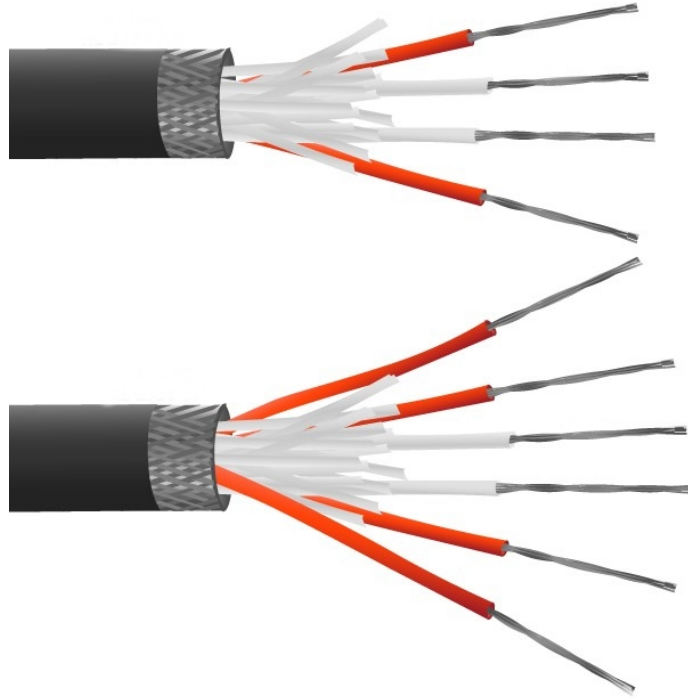

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

3 Core PFA Insulated, Tin Plated Copper Screen, PRT Sensor Cable / Wire

High temperature to 260°C, extruded PFA Teflon® construction. Commonly used for Pt100? thermometers, also suitable with other types such as Pt130, Pt500 & Pt1000?

Specifications
Specifications

General Description	PFA insulated 7/0.2mm tin plated copper conductors, twisted cores with nylon cord, tin plated copper braided screen with PFA insulated outer jacket
Cable Length	10, 25, 50, 100m
Cable Type	PFA Teflon® construction
Core / Strands	7/0.2mm
Insulation Material	PFA Insulated
Max. Temperature	+260°C
Min. Temperature	-75°C
Number of Wires	3
Standards Met	Cores colour coded Red & White in accordance with IEC-751, black outer jacket