


# RTD Temperature Sensor with Integral Transmitter & Hirschmann Connector


**'HIRSCHMANN PT100 ASSEMBLY WITH INTEGRAL 4-20mA TRANSMITTER'**

(Default range 0–100°C unless specified otherwise)

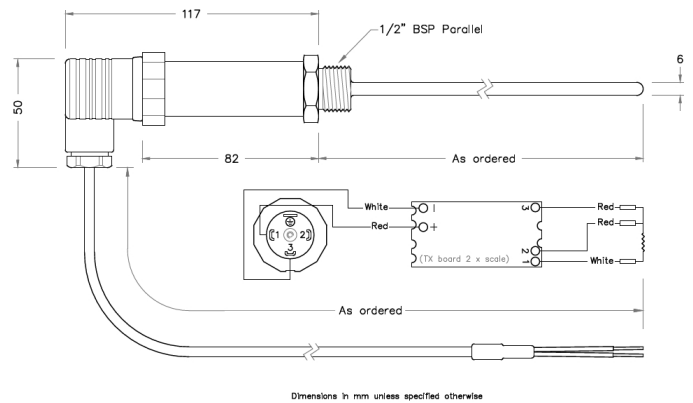

[Click here to view product](#)

<b>Product Code</b>	XE-5675
<b>General Description</b>	RTD Temperature Sensor with Integral Transmitter
<b>Sensor Type</b>	PT100 Class A
<b>Minimum Span</b>	25°C *1
<b>Process Connection</b>	1/2" BSP
<b>Probe Diameter</b>	6.0mm
<b>Probe Length</b>	50mm, 75mm, 100mm, 150mm, 200mm and 300mm lengths available below hex
<b>Cable Length</b>	1m
<b>Cable Type</b>	PVC Insulated
<b>Max. Temperature</b>	+250°C



[www.labfacility.com](http://www.labfacility.com) | [sales@labfacility.com](mailto:sales@labfacility.com)

sales tel: +44(0)1243 871280

<b>Min. Temperature</b>	-50°C
<b>Standards Met</b>	EMC: BS EN 61326. Ingress Protection: BS EN 60529. RoHS Directive 2011/65/EU
<b>IP Rating</b>	IP65
<b>Connector Type</b>	Hirschmann
<b>Connection Type</b>	DIN connector Screw terminal
<b>Ambient Temperature</b>	Operating / Storage: -40° to 85°C (full accuracy only between -30° to 75°C)
<b>Ambient Humidity</b>	Operating / Storage: 10 - 90 %RH non-condensing
<b>Loop Supply</b>	10 - 30 V DC
<b>Output Details</b>	2 Wire Current (4 to 20) mA
<b>Configuration Software</b>	<a href="http://www.status.co.uk/software.html">www.status.co.uk/software.html</a>
<b>Configuration Device</b>	USB-CONFIG-MKII (XE-6267-001)