


Type J PFA Insulated Twin Twisted Pair Thermocouple Cable / Wire (IEC)

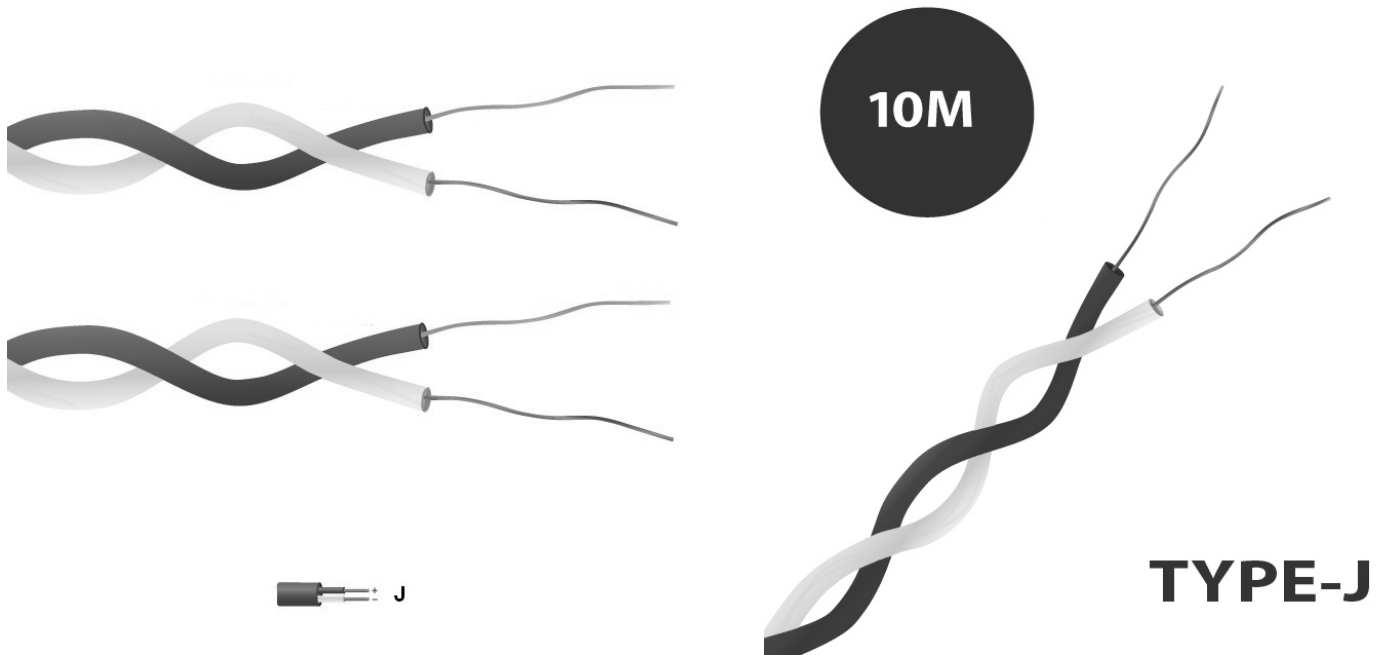

[Click here to view product](#)

Product Code	XE-2509
General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
Cable Length	10m, 25m, 50m, 100m
Cable Type	Single pair of PFA insulated conductors twisted together
Core / Strands	1/0.2mm / 1/0.3mm, 1/0.508mm
Conductor Cross Section 1/0.2 (mm²)	0.032
Conductor Cross Section 1/0.315 (mm²)	0.078

Conductor Cross Section 1/0.508 (mm ²)	0.203
+ Colour	Black
- Colour	White
Drain Wire	No
Insulation Material	PFA Teflon®
Loop Resistance 1/0.2 (Ohms per combined metre)	19.3
Loop Resistance 1/0.315 (Ohms per combined metre)	7.8
Loop Resistance 1/0.508 (Ohms per combined metre)	3.0
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Iron
- Conductor	Constantan
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	J
Tolerance	Class 1